

# SPZ Metric V-Belt Sheaves - Taper Bushed



Models Available




Fig 1

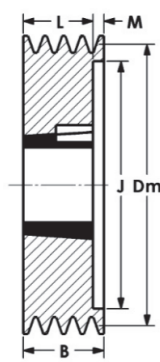


Fig 2

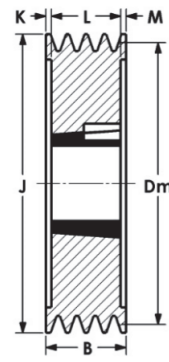


Fig 4

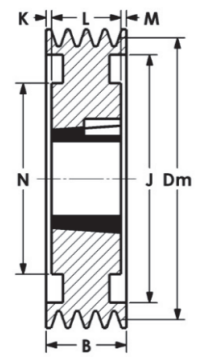


Fig 6

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPZ140 x 1-1610	140	1	1610	42	1	16	—	—	25	9	92	1.2
SPZ140 x 2-1610		2	1610	42	2	28	111	—	25	3	—	1.7
SPZ140 x 3-2012		3	2012	50	2	40	111	—	32	8	—	2.6
SPZ140 x 4-2012		4	2012	50	2	52	111	—	32	20	—	2.9
SPZ140 x 5-2517*		5	2517	65	2	64	111	—	45	19	—	3.2
SPZ140 x 6-2517*		6	2517	65	2	76	111	—	45	31	—	3.5
SPZ140 x 8-2517*		8	2517	65	4	100	111	27.5	45	27.5	—	4.0
SPZ150 x 1-1610	150	1	1610	42	1	16	—	—	25	9	92	1.2
SPZ150 x 2-2012		2	2012	50	1	28	—	—	33.5	5.5	112	2.0
SPZ150 x 3-2012		3	2012	50	2	40	121	—	32	8	—	3.1
SPZ150 x 4-2517*		4	2517	65	2	52	121	—	45	7	—	3.7
SPZ150 x 5-2517*		5	2517	65	2	64	121	—	45	19	—	4.0
SPZ150 x 6-2517*		6	2517	65	2	76	121	—	45	31	—	4.4
SPZ150 x 8-2517*		8	2517	65	4	100	121	27.5	45	27.5	—	5.1
SPZ160 x 1-1610	160	1	1610	42	1	16	—	—	25	9	92	1.3
SPZ160 x 2-2012		2	2012	50	1	28	—	—	32	4	112	2.5
SPZ160 x 3-2012		3	2012	50	2	40	131	—	32	8	—	3.6
SPZ160 x 4-2517*		4	2517	65	2	52	131	—	45	7	—	4.4
SPZ160 x 5-2517*		5	2517	65	2	64	131	—	45	19	—	4.8
SPZ160 x 6-2517*		6	2517	65	2	76	131	—	45	31	—	5.2
SPZ160 x 8-2517*		8	2517	65	4	100	131	27.5	45	27.5	—	5.6
SPZ170 x 1-1610	170	1	1610	42	1	16	—	—	25	9	92	1.5
SPZ170 x 2-2012		2	2012	50	1	28	—	—	32	4	112	2.5
SPZ170 x 3-2012		3	2012	50	6	40	141	—	32	8	112	4.2
SPZ170 x 4-2517*		4	2517	65	2	52	141	—	45	7	—	5.3
SPZ170 x 5-2517*		5	2517	65	2	64	141	—	45	19	—	5.9
SPZ170 x 6-2517*		6	2517	65	2	76	141	—	45	31	—	6.5
SPZ170 x 8-2517*		8	2517	65	4	100	141	27.5	45	27.5	—	6.8
SPZ180 x 1-1610	180	1	1610	42	1	16	—	—	25	9	92	1.6
SPZ180 x 2-2012		2	2012	50	1	28	—	—	32	4	112	2.5
SPZ180 x 3-2012		3	2012	50	6	40	151	—	32	8	112	4.8
SPZ180 x 4-2517*		4	2517	65	6	52	151	—	45	7	124	6.1
SPZ180 x 5-2517*		5	2517	65	6	64	151	—	45	19	124	6.3
SPZ180 x 6-2517*		6	2517	65	6	76	151	—	45	31	124	6.8
SPZ180 x 8-3020		8	3020	75	4	100	151	24.5	51	24.5	—	7.1

Note: \* Requires bushing with BSW threads