

SPB Metric V-Belt Sheaves - Taper Bushed



Models Available

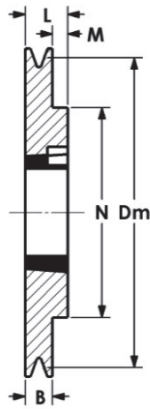


Fig 1



Fig 2

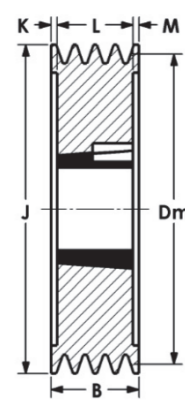


Fig 4

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPB160 x 1-1610	160	1	1610	42	1	25	—	—	25	—	92	2.5
SPB160 x 2-2012		2	2012	50	2	44	114	—	32	12	—	2.9
SPB160 x 3-2517*		3	2517	65	2	63	114	—	45	18	—	4.2
SPB160 x 4-2517*		4	2517	65	4	82	114	18.5	45	18.5	—	4.9
SPB160 x 5-2517*		5	2517	65	4	101	114	28	45	28	—	6.0
SPB160 x 6-3020		6	3020	75	4	120	114	34.5	51	34.5	—	5.4
SPB170 x 1-1610	170	1	1610	42	1	25	—	—	25	—	92	2.9
SPB170 x 2-2012		2	2012	50	2	44	124	—	32	12	—	3.3
SPB170 x 3-2517*		3	2517	65	2	63	124	—	45	18	—	4.9
SPB170 x 4-2517*		4	2517	65	4	82	124	18.5	45	18.5	—	5.7
SPB170 x 5-3020		5	3020	75	4	101	124	25	51	25	—	6.1
SPB170 x 6-3020		6	3020	75	4	120	124	34.5	51	34.5	—	6.5
SPB170 x 8-3030		8	3030	75	4	158	129	41	76	41	—	9.5
SPB180 x 1-1610		180	1	1610	42	1	25	—	—	25	—	92
SPB180 x 2-2517*	2		2517	65	1	44	134	—	45	1	—	4.5
SPB180 x 3-2517*	3		2517	65	2	63	134	—	45	18	—	5.5
SPB180 x 4-2517*	4		2517	65	4	82	134	18.5	45	18.5	—	6.9
SPB180 x 5-3020	5		3020	75	4	101	134	25	51	25	—	7.1
SPB180 x 6-3020	6		3020	75	4	120	134	34.5	51	34.5	—	7.7
SPB180 x 8-3030	8		3030	75	4	158	139	41	76	41	—	11.2
SPB190 x 1-2012	190		1	2012	50	1	25	—	—	32	7	112
SPB190 x 2-2517*		2	2517	65	1	44	—	—	45	1	124	5.0
SPB190 x 3-2517*		3	2517	65	2	63	144	—	45	18	—	6.3
SPB190 x 4-2517*		4	2517	65	4	82	144	18.5	45	18.5	—	7.6
SPB190 x 5-3020		5	3020	75	4	101	144	25	51	25	—	8.1
SPB190 x 6-3020		6	3020	75	4	120	144	34.5	51	34.5	—	9.2
SPB190 x 8-3020		8	3020	75	4	158	149	41	76	41	—	12.4
SPB200 x 1-2012		200	1	2012	50	1	25	—	—	32	7	95
SPB200 x 2-2517*	2		2517	65	1	44	—	—	45	1	124	5.4
SPB200 x 3-2517*	3		2517	65	2	63	154	—	45	18	—	6.5
SPB200 x 4-3020	4		3020	75	2	82	154	—	51	31	—	8.8
SPB200 x 5-3020	5		3020	75	2	101	154	—	51	50	—	9.1
SPB200 x 6-3020	6		3020	75	4	120	154	34.5	51	34.5	—	10.3
SPB200 x 8-3535*	8		3535	90	4	158	159	34.5	89	34.5	—	13.5

Note: * Requires bushing with BSW threads.