

SPB Metric V-Belt Sheaves - Taper Bushed



Models Available

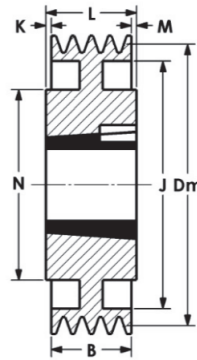


Fig 7

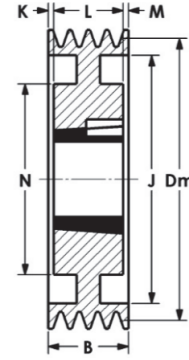


Fig 8

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPB375 x 2-3020	375	2	3020	75	7	44	335	3.5	51	3.5	159	9.5
SPB375 x 3-3020		3	3020	75	8	63	335	6	51	6	159	11.5
SPB375 x 4-3525		4	3525	90	8	82	335	8.5	65	8.5	178	16.5
SPB375 x 5-3535*		5	3535	90	8	101	335	18	65	18	178	21.0
SPB375 x 6-3535*		6	3535	90	8	120	335	27.5	65	27.5	178	25.0
SPB375 x 8-4040		8	4040	90	8	158	335	46.5	65	46.5	178	28.0
SPB400 x 2-3020	400	2	3020	75	7	44	354	3.5	51	3.5	159	10.0
SPB400 x 3-3535*		3	3535	90	7	63	354	13	89	13	178	18.3
SPB400 x 4-3535*		4	3535	90	7	82	354	3.5	89	3.5	178	20.5
SPB400 x 5-3535*		5	3535	90	8	101	354	6	89	6	178	23.4
SPB400 x 6-3535*		6	3535	90	8	120	354	15.5	89	15.5	179	25.1
SPB400 x 8-4040		8	4040	100	8	158	362	28	102	28	216	36.5
SPB400 x 10-4040	10	4040	100	8	196	362	47	102	47	216	41.0	
SPB450 x 2-3020	450	2	3020	75	7	44	410	3.5	51	3.5	159	12.1
SPB450 x 3-3535*		3	3535	90	7	63	410	13	89	13	178	21.9
SPB450 x 4-3535*		4	3535	90	7	82	410	3.5	89	3.5	178	24.5
SPB450 x 5-3535*		5	3535	90	8	101	410	6	89	6	178	27.3
SPB450 x 6-4040		6	4040	100	8	120	410	9	102	9	216	35.5
SPB450 x 8-4040		8	4040	100	8	158	410	28	102	28	216	40.9
SPB450 x 10-4545	10	4545	110	8	196	410	40.5	115	40.5	242	53.5	
SPB500 x 2-3020	500	2	3020	75	7	44	454	3.5	51	3.5	159	13.2
SPB500 x 3-3535*		3	3535	90	7	63	454	13	89	13	178	23.1
SPB500 x 4-3535*		4	3535	90	7	82	454	3.5	89	3.5	178	26.6
SPB500 x 5-3535*		5	3535	90	8	101	454	6	89	6	178	29.9
SPB500 x 6-4040		6	4040	100	8	120	454	9	102	9	216	38.9
SPB500 x 8-4040		8	4040	100	8	158	460	28	102	28	216	45.5
SPB500 x 10-4545	10	4545	110	8	196	460	40.5	115	40.5	242	61.0	
SPB560 x 2-3020	560	2	3020	75	7	44	525	16	76	16	159	17.1
SPB560 x 3-3535*		3	3535	90	7	63	525	—	89	26	178	25.9
SPB560 x 4-3535*		4	3535	90	7	82	525	—	89	7	178	29.0
SPB560 x 5-4040		5	4040	100	7	101	525	0.5	102	0.5	216	35.3
SPB560 x 6-4040		6	4040	100	8	120	525	9	102	9	216	43.1
SPB560 x 8-4545		8	4545	110	8	158	525	21.5	115	21.5	242	49.0
SPB560 x 10-4545	10	4545	110	8	196	525	40.5	115	40.5	242	65.0	
SPB630 x 2-3030	630	2	3030	75	7	44	584	16	76	16	146	19.3
SPB630 x 3-3535*		3	3535	90	7	63	584	13	89	13	178	28.9
SPB630 x 4-3535*		4	3535	90	7	82	284	3.5	89	3.5	178	33.3
SPB630 x 5-4040		5	4040	100	7	101	584	0.5	102	0.5	216	43.1
SPB630 x 6-4040		6	4040	100	8	120	584	9	102	9	216	49.2
SPB630 x 8-4545		8	4545	110	8	158	590	21.5	115	21.5	242	62.0
SPB630 x 10-4545	10	4545	110	8	196	590	40.5	115	40.5	242	72.0	

Note: * Requires bushing with BSW threads.