

SPB Metric V-Belt Sheaves - Taper Bushed



Models Available

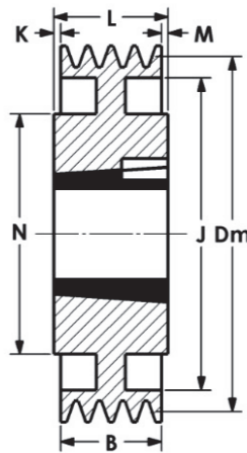


Fig 7

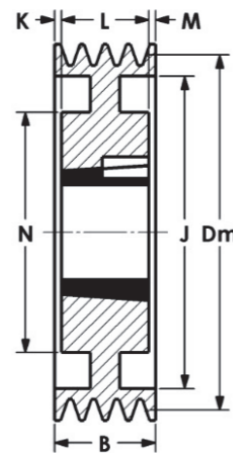


Fig 8

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPB710 x 2-3030	710	2	3030	75	7	44	670	16	76	16	145	23.0
SPB710 x 3-3535*		3	3535	90	7	63	670	13	89	13	180	33.2
SPB710 x 4-3535*		4	3535	90	7	82	670	3.5	89	3.5	180	39.1
SPB710 x 5-4040		5	4040	100	7	101	670	0.5	102	0.5	215	50.2
SPB710 x 6-4545		6	4545	110	8	120	670	2.5	115	2.5	242	62.3
SPB710 x 8-4545		8	4545	110	8	158	670	21.5	115	21.5	242	71.0
SPB710 x 10-4545		10	4545	110	8	196	670	40.5	115	40.5	242	80.0
SPB800 x 2-3535*	800	2	3535	90	7	44	760	22.5	89	22.5	180	29.8
SPB800 x 3-3535*		3	3535	90	7	63	760	13	89	13	180	36.7
SPB800 x 4-4040		4	4040	100	7	82	760	10	102	10	215	48.8
SPB800 x 5-4040		5	4040	100	7	101	760	0.5	102	0.5	216	56.1
SPB800 x 6-4545		6	4545	110	8	120	760	2.5	115	2.5	242	71.4
SPB800 x 8-4545		8	4545	110	8	158	760	21.5	115	21.5	242	90.9
SPB800 x 10-4545		10	4545	110	8	196	760	40.5	115	40.5	242	102.0
SPB900 x 3-3535*	900	3	3535	90	7	63	858	13	89	13	180	46.8
SPB900 x 4-4040		4	4040	100	7	82	858	10	102	10	216	60.0
SPB900 x 5-4545		5	4545	110	7	101	858	7	115	7	242	74.8
SPB900 x 6-4545		6	4545	110	8	120	858	2.5	115	2.5	242	81.5
SPB900 x 8-4545		8	4545	110	8	158	858	21.5	115	21.5	242	110.0
SPB900 x 10-5050		10	5050	125	8	196	858	34.5	127	34.5	267	126.0
SPB1000 x 3-4040		1000	3	4040	100	7	63	958	19.5	102	19.5	216
SPB1000 x 4-4040	4		4040	100	7	82	958	10	102	10	216	66.5
SPB1000 x 5-4545	5		4545	110	7	101	958	7	115	7	242	80.5
SPB1000 x 6-4545	6		4545	110	8	120	958	2.5	115	2.5	242	90.0
SPB1000 x 8-5050	8		5050	125	8	158	958	15.5	127	15.5	267	132.0
SPB1000 x 10-5050	10		5050	125	8	196	958	34.5	127	34.5	267	147.0
SPB1250 x 3-4040	1250		3	4040	100	7	63	1208	19.5	102	19.5	216
SPB1250 x 4-4545		4	4545	110	7	82	1208	16.5	115	16.5	242	152.0
SPB1250 x 5-4545		5	4545	110	7	101	1208	7	115	7	242	175.0
SPB1250 x 6-5050		6	5050	125	7	120	1208	3.5	127	3.5	267	190.0
SPB1250 x 8-5050		8	5050	125	8	158	1208	15.5	127	15.5	267	232.0

Note: * Requires bushing with BSW threads.