

SPC Metric V-Belt Sheaves - Taper Bushed



Models Available



Fig 1



Fig 4

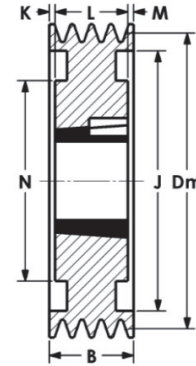


Fig 6

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPC200 x 3-2517*	200	3	2517	65	4	85	151	20	45	20	—	9.0
SPC200 x 4-3020		4	3020	75	4	110.5	151	29.8	51	29.8	—	10.5
SPC200 x 5-3535*		5	3535	90	4	136	151	16	89	31	—	14.0
SPC200 x 6-3535*		6	3535	90	4	161.5	151	15.8	89	56.8	—	17.0
SPC200 x 8-3535*		8	3535	90	4	212.5	151	45.8	89	77.8	—	23.0
SPC212 x 3-3020	212	3	3020	75	4	85	163	17	51	17	—	10.0
SPC212 x 4-3020		4	3020	75	4	110.5	163	29.8	51	29.8	—	12.5
SPC212 x 5-3535*		5	3535	90	4	136	163	16	89	31	—	15.0
SPC212 x 6-3535*		6	3535	90	4	161.5	163	36.3	89	36.3	—	18.0
SPC212 x 8-3535*		8	3535	90	4	212.5	163	45.8	89	77.8	—	24.0
SPC224 x 2-3020	224	2	3020	75	4	59.5	170	4.3	51	4.3	—	8.1
SPC224 x 3-3020		3	3020	75	4	85	170	17	51	17	—	11.0
SPC224 x 4-3535*		4	3535	90	4	110.5	170	10.8	89	10.8	—	14.0
SPC224 x 5-3535*		5	3535	90	4	136	170	23.5	89	23.5	—	16.2
SPC224 x 6-3535*		6	3535	90	4	161.5	170	36.3	89	36.3	—	19.0
SPC224 x 8-3535*		8	3535	90	4	212.5	170	45.8	89	77.8	—	24.9
SPC236 x 3-3020	236	3	3020	75	4	85	182	17	51	17	—	12.0
SPC236 x 4-3535*		4	3535	90	4	110.5	182	10.8	89	10.8	—	17.2
SPC236 x 5-3535*		5	3535	90	4	136	182	23.5	89	23.5	—	19.1
SPC236 x 6-3535*		6	3535	90	4	161.5	182	36.3	89	36.3	—	20.8
SPC236 x 8-3535*		8	3535	90	4	212.5	182	45.8	89	77.8	—	25.5
SPC250 x 2-3020	250	2	3020	75	4	59.5	170	4.1	51	4.5	—	9.8
SPC250 x 3-3020		3	3020	75	4	85	200	17	51	17	—	14.5
SPC250 x 4-3535*		4	3535	90	4	110.5	200	10.8	89	10.8	—	20.7
SPC250 x 5-3535*		5	3535	90	4	136	200	23.5	89	23.5	—	22.8
SPC250 x 6-3535*		6	3535	90	4	161.5	200	36.3	89	36.3	—	26.0
SPC250 x 8-3535*		8	3535	90	4	212.5	200	61.8	89	61.8	—	29.7
SPC250 x 10-4040		10	4040	100	4	264	200	81	102	81	—	32.0
SPC265 x 3-3535*	265	3	3535	90	1	85	215	—	89	4	178	21.2
SPC265 x 4-3535*		4	3535	90	6	110.5	215	10.8	89	10.8	178	24.0
SPC265 x 5-3535*		5	3535	90	6	136	215	23.5	89	23.5	178	26.2
SPC265 x 6-3535*		6	3535	90	6	161.5	215	36.3	89	36.3	178	29.0
SPC265 x 8-3535*		8	3535	90	6	212.5	215	61.8	89	61.8	178	33.3

Note: * Requires bushing with BSW threads.