


# Metric Stainless Attachment Chain

## E-Series




### A1 = Stainless Bent Tab, 1 Hole, 1 Side

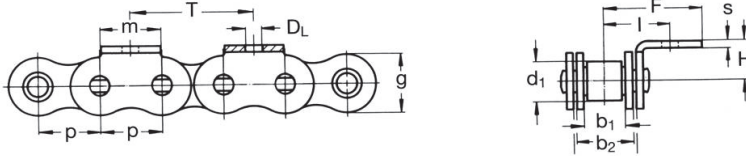


Chain Size	Attachment Connecting Link Part No.
05B-1	E05B-1 SS CL - A1
06B-1	E06B-1 SS CL - A1
08B-1	E08B-1 SS CL - A1
10B-1	E10B-1 SS CL - A1
12B-1	E12B-1 SS CL - A1
16B-1	E16B-1 SS CL - A1

### K1 = Stainless Bent Tab, 1 Hole, 2 Sides

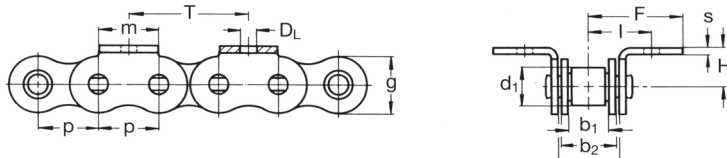


Chain Size	Attachment Connecting Link Part No.
05B-1	E05B-1 SS CL - K1
06B-1	E06B-1 SS CL - K1
08B-1	E08B-1 SS CL - K1
10B-1	E10B-1 SS CL - K1
12B-1	E12B-1 SS CL - K1
16B-1	E16B-1 SS CL - K1

### SA1 = Stainless Straight Plate, 1 Hole, 1 Side

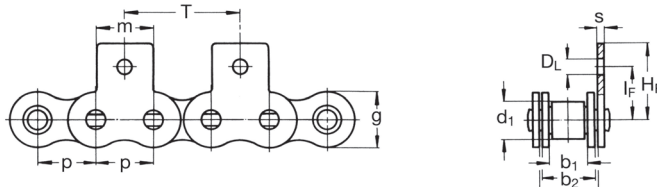


Chain Size	Attachment Connecting Link Part No.
05B-1	E05B-1 SS CL - SA1
06B-1	E06B-1 SS CL - SA1
08B-1	E08B-1 SS CL - SA1
10B-1	E10B-1 SS CL - SA1
12B-1	E12B-1 SS CL - SA1
16B-1	E16B-1 SS CL - SA1

### SK1 = Stainless Straight Plate, 1 Hole, 2 Sides

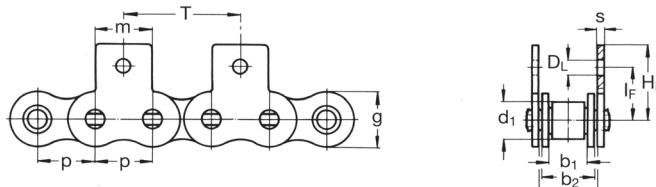

Chain Size	Attachment Connecting Link Part No.
05B-1	E05B-1 SS CL - SK1
06B-1	E06B-1 SS CL - SK1
08B-1	E08B-1 SS CL - SK1
10B-1	E10B-1 SS CL - SK1
12B-1	E12B-1 SS CL - SK1
16B-1	E16B-1 SS CL - SK1

### EP1 = Stainless Extended Pin

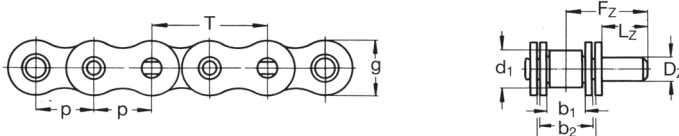

Chain Size	Attachment Connecting Link Part No.
05B-1	E05B-1 SS CL - EP1
06B-1	E06B-1 SS CL - EP1
08B-1	E08B-1 SS CL - EP1
10B-1	E10B-1 SS CL - EP1
12B-1	E12B-1 SS CL - EP1
16B-1	E16B-1 SS CL - EP1

T = 2p as shown, other spacing as required.

Chain Size	Pitch p		Inner Width b <sub>1</sub> min mm	Inner Link Width b <sub>2</sub> max mm	Roller Dia. d <sub>1</sub> min mm	Plate Height g max. mm	Attachment Dimensions										
	mm	in					m	D <sub>L</sub>	l	F	H	I <sub>F</sub>	H <sub>F</sub>	S	D <sub>Z</sub> h9	L <sub>Z</sub>	F <sub>Z</sub>
05B-1	8	—	3.00	4.77	5.00	7.1	8.0	3.20	6.6	12.0	5.0	7.5	13.0	0.80	4.0	10	13.3
06B-1*	9.525	3/8	5.72	8.53	6.35	8.2	8.0	3.50	9.5	13.5	6.5	9.0	13.4	1.25	5.0	15	20.7
08B-1	12.7	1/2	7.75	11.30	8.51	11.8	12.5	4.50	13.1	19.0	10.0	14.7	20.3	1.60	6.0	15	22.4
10B-1	15.875	5/8	9.65	13.28	10.16	14.7	15.0	5.50	16.7	27.0	10.0	17.2	26.7	1.70	6.5	20	28.5
12B-1	19.5	3/4	11.68	15.62	12.07	16.1	18.5	6.60	18.5	29.0	11.0	18.7	29.0	1.80	7.0	20	29.8
16B-1	25.4	1	17.02	25.40	15.88	21.0	25.0	10.00	28.9	41.5	18.0	41.8	28.6	3.00	10.0	30	45.9

\* With straight side plates only.

Note: The above attachments are Connecting Type Links for simple assembly by the equipment user. Chain with riveted attachments can be assembled to order at PTI in Charlotte. Inner Links with attachments, although not as common, are also possible from production. For custom chains, please detail the requirements on the Attachment Detail page.